

Intelligent Indoor Parking

Győző Gódor*, Árpád Huszák* and Károly Farkas^{†,*}

[†]Inter-University Centre for Telecommunications and Informatics, Debrecen, Hungary

*Department of Networked Systems and Services,

Budapest University of Technology and Economics, Budapest, Hungary

Email: {godorgy, huszak, farkask}@hit.bme.hu

Abstract—Nowadays positioning based navigation is an integrated part of our everyday's routine. Hence, it is hard to succeed without a GPS based navigation system in a bigger city today. However, indoor positioning and navigation are still in their infancy, although these services would be desirable in many areas. One obvious application domain is vehicle navigation in a parking garage. The use of an indoor vehicle navigation system is convenient for the drivers, decreases the unnecessary circling in the garage and reduces air pollution. In this paper, we introduce our iParking indoor positioning and navigation system which has been under development. Our system monitors the occupancy of the parking lots, and with the aid of a Wi-Fi based background wireless infrastructure tracks the position of the vehicle entering the parking garage and navigates the driver to an appropriate free parking lot. Lot selection is handled at the entry point of the garage based on simple preferences, eg., the closest disabled parking space. The navigation interface is the driver's smartphone. Currently, we have been implementing a prototype of our iParking system in a parking garage of a shopping mall for demonstration purposes.

Keywords-iParking, Indoor positioning, Wi-Fi, Navigation, Android

I. INTRODUCTION

With the proliferation of mobile devices location-aware services are getting popular today. Navigation based on position sensing has already a long history. In outdoor environments, GPS (Global Positioning System) based navigation is achievable for almost everybody today as integrated part of the daily routine. However, indoor positioning and navigation services are still under research and development due to facing complex technical challenges and/or considerable investment costs. One of the possible application domains is indoor parking. The use of an indoor parking assistance system has several benefits, such as reduced time in parking lot seeking, decreased human power in traffic control, reduced CO₂ emission and less driver frustration.

In this paper, we introduce our intelligent indoor parking system called iParking. It is Wi-Fi based, because Wi-Fi is a prevalent technology for indoor positioning providing an acceptable compromise between cost and accuracy. As a prerequisite, our iParking system periodically collects occupancy information about the parking lots of the given parking garage via ultrasonic sensors which are usually deployed together with shaping the parking lots. When the vehicle enters the parking garage the Wi-Fi based background

infrastructure tracks its position and navigates the driver to an appropriate free parking space. For position estimation we use signal fingerprint based algorithms. Usually, only one fingerprint database is available at the server, but in our iParking system we can handle even more to increase the positioning accuracy. The advantage of the proposed multiple fingerprint solution is that the algorithm can switch from one database to another and adapt to the actual conditions in the parking garage. Similarly, it is also possible to maintain a fingerprint database for pedestrians and in-vehicle users. The target lot is selected at the entrance of the garage via a simple procedure using preferences, such as the closest disabled parking space, family parking lot, or the closest parking lot to the entrance of the favorite shop. Navigation is carried out on the driver's smartphone as it would happen on a GPS based navigation device.

Currently, for demonstration purposes we have been implementing a prototype of our iParking system in a parking garage of a shopping mall. The garage has 3 levels, and our demo sector covers approximately 2000 square meters containing 150 parking lots which is roughly one fourth of level 1. The background Wi-Fi infrastructure, used for position sensing, consists of 10 APs (Access Point), 3 switches and a central server. The navigation client software has been developed for Android platform. We could achieve 5–7 meters positioning accuracy so far which makes the navigation part challenging. Thus, at the moment we have been working on increasing the accuracy up to 2–3 meters which seems to be enough for smooth navigation. For example, using adaptation and multiple fingerprint databases showed an increase in positioning accuracy up to 1.7–4.5 meters in average in the presented iParking environment.

The rest of the paper is structured as follows. In Section II, we overview some related, indoor positioning systems shortly. Our iParking system is introduced and described in Section III, and we present its prototype implementation with a short preliminary evaluation in Section IV and Section V, respectively. Finally, we give a summary in Section VI.

II. OVERVIEW OF INDOOR POSITIONING SYSTEMS

Indoor positioning systems can be classified according to the used position estimation technique (eg., triangulation, scene analysis, proximity), the applied wireless technology (eg., Wi-Fi, Bluetooth, RFID, UWB), or the performance metrics (eg., accuracy, scalability, complexity, cost) [1]. Since our iParking

system utilizes Wi-Fi signal fingerprint methods, we focus our overview on Wi-Fi and scene analysis based indoor positioning systems. In scene analysis algorithms, the fingerprints of a scene must be collected first (off-line phase) and the location of the mobile device is estimated in the second phase (online phase) by matching the measurements with the closest a priori location fingerprints. For finding the best match(es) several pattern recognition techniques exist, like probabilistic methods, K-nearest-neighbor (KNN), neural networks, support vector machine (SVM), etc.

The first published in-building user location and tracking system was RADAR [2]. The authors proposed an approach based on empirical measurements and signal propagation model to upload the fingerprint database with received signal strength (RSS) values. In order to find the best matching RSS value measured by the user, the KNN algorithm is applied. The RADAR system's accuracy is around 2–3m. Its enhanced version [3] was extended with a Viterbi-like algorithm, resulting that in 50% of the cases the accuracy was 2.37–2.65m, while its 90 percentile was 5.93–5.97m.

Another system, Horus [4], [5], applies a joint clustering technique that uses RSS probability distributions to address the noisy wireless channel. Location clustering reduces the computational cost of searching the radio map and increases the accuracy of the location determination system without scalability problems in larger coverage areas. Implementation results show that the Horus system's accuracy is within 2.1m with 90% probability.

Several systems were deployed using Bayesian model for topological localization [6], [7], [8]. In these probabilistic solutions, the host computes the likelihood of a number of different locations, based on the RSS values. The Ekahau system [9] is a commercial wireless location sensing system that combines Bayesian networks, stochastic complexity and online competitive learning with a result of 1m accuracy.

However, none of these systems provides navigation services.

III. IPARKING SYSTEM

Our iParking system combines two approaches to investigate different positioning solutions. In the first approach, the position of a mobile device can be determined at any point of the covered area. The other approach is based on positioning gates and valid locations are only pre-defined points of the field, thus the exact positions of the gates and their proximity. The former approach comes to the front when the task is, for instance, to find the parked vehicle in the garage and the driver should be navigated back to his/her car. The latter approach is reasonable when the vehicle is navigated in the garage because it can be located only on the garage roads (or in the road segments) and in the parking lots. Fortunately, both approaches can be supported by almost the same background Wi-Fi infrastructure.

The major components of our iParking system are depicted in Fig. 1. These components are:

- Central server;

- Communication infrastructure;
- Wi-Fi access points;
- Client devices.

In the following, we discuss the functions of these major components.

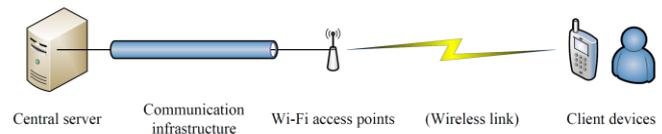


Figure 1. Major components of the iParking system

A. Central Server

The central server is a dedicated computer which basically stores the signal fingerprint database(s) and runs position calculations when the infrastructure is in charge of determining the location of the visiting mobile node. Actually, we store two different fingerprint databases on our central server. One is used for pedestrian users, while the other one is for invehicle customers. Of course, the number of specific fingerprint databases can be increased depending on other features, as well.

In the presented iParking system we used a simple algorithm to decide which database should be applied. The users entering the garage at the car entrance will use the in-vehicle database (the fingerprints were recorded with a device located in a vehicle), while the users coming from inside the building will utilize the pedestrian fingerprint database (the fingerprints were recorded with a device carried by a pedestrian). We used centralized fingerprint management, however an alternative is if the mobile device determines its own position assuming that it has enough storage capacity, computation power and it possesses the fingerprint database. This alternative may have also benefits when device specific fingerprint databases are available.

The server can be installed with an appropriate distribution of any operating system (eg., Linux, Windows) which is optimized for the limited hardware. We are running an embedded Linux version on our central server tailored for the required tasks.

The main functions of the server are: stores the map and the fingerprint database(s) of the parking area; monitors the occupancy of the parking lots via ultrasonic sensors; continuously collects Wi-Fi signal strength information of the visiting mobile devices via access points; calculates the positions of the mobile nodes to be tracked; and sends back the calculated position information to the visiting device via the Wi-Fi infrastructure.

B. Communication Infrastructure

The main function of the communication infrastructure is to ensure the connection between the central server and the Wi-Fi

access points, and to provide a wireless link for client devices to access the iParking system.

The communication infrastructure is responsible for forwarding the traffic between the APs and the central server, and it is used to configure the APs remotely. The direct wireless link between the APs and the client devices can be considered as also part of the communication infrastructure.

Additionally, the communication infrastructure may be used to handle other types of traffic, eg., it may support Internet access for end users. However, in our prototype system no other services are implemented.

C. Wi-Fi Access Points

Since our iParking system is based on Wi-Fi technology, we use Wi-Fi access points at the perimeter of the background infrastructure. Their main functions are: collect the necessary data (RSS information of each client device) for the position estimation algorithm; forward the collected data to the central server; connect the client devices to the background infrastructure; forward the computed position estimation back to the client devices.

D. Client Devices

The provided positioning and navigation services can be used via the users' mobile devices, thus they are the clients of our assisted parking system. Smart phones or tablets equipped with Wi-Fi interface are capable to monitor signal strength data; to receive position information; to display the garage map; and to run the navigation software. Moreover, the users' interactions are handled also via these devices.

IV. PROTOTYPE IMPLEMENTATION

A. Demo Sector

As a proof of concept, we have been implementing a prototype of our iParking system. We have chosen the parking garage of a shopping center as the test location. The garage has three levels from which level 1 has been selected to host the demo sector. Fortunately, this level consists of two totally distinct parts. One of them is used by officers and the other one is used by normal visitors. The two parts are separated by an entrance gate. We set out only a section of level 1 from the public part for our experiments, roughly covering one fourth of the whole territory. Level 1 of the parking garage and the demo sector are shown in Fig. 2. The demo sector is highlighted with red color.

The selected demo sector is convenient to handle, because it has only one joint entrance and exit for vehicles, another one for pedestrians, and consists of three lanes (roads) with some junctions. The covered parking area is about 2000 square meters with around 150 parking lots.

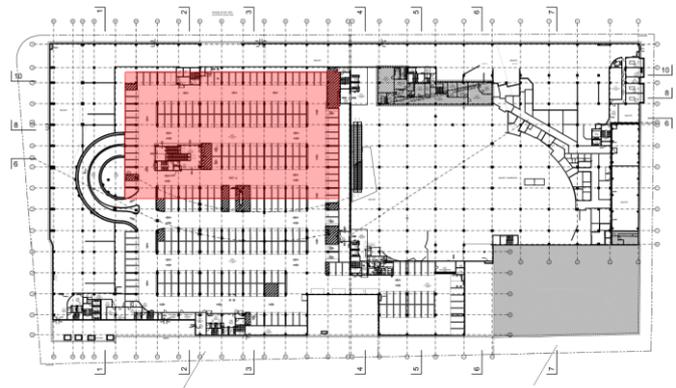


Figure 2. Level 1 of the parking garage and the demo sector

B. Logical System Structure and Physical Setup

Our principle in designing the network was to place the Wi-Fi access points in the way that everywhere in the demo sector we can perceive the signal with strong enough strength of at least three APs (to be able to investigate also triangulation based positioning algorithms), but keep the number of deployed APs as low as possible.

It turned out that 10 APs are sufficient to satisfy this condition. Furthermore, we used three Ethernet switches to connect the APs to the central server. Fig. 3 shows the logical structure of our prototype system.

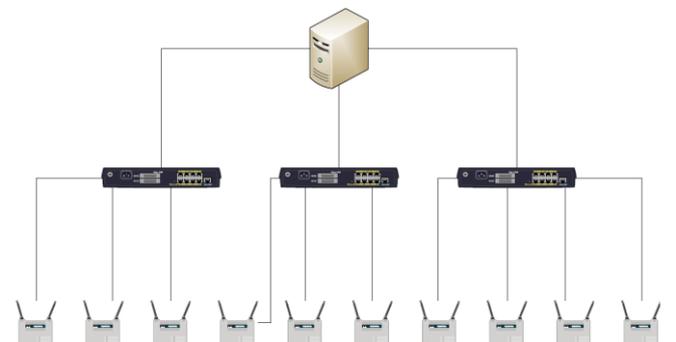


Figure 3. Logical system structure

To be able to test the two different positioning approaches (mentioned in Section III) simultaneously without the need of deploying two separate systems, we chose suitable network elements. The main difference between the two systems lies in the antenna type selection. To implement the first approach, we selected omni-directional antennae, while for the second approach we used directional antennae. Thus, we needed such wireless APs which can handle two antennae with different types without changing the physical setup. The selected devices of our prototype system are the following:

- TP-LINK TL-MR3420 300Mbps 3G WLAN router;
- TP-LINK TL-ANT2408C 2.4GHz 8dBi indoor desktop omni-directional antenna;

- TP-LINK TL-ANT2409A 2.4GHz 9dBi directional antenna;
- TP-LINK TL-SF1008P 8-port 10/100M desktop PoE switch (4-port PoE);
- TP-LINK TL-PoE10R 5V/12V PoE adapter;
- ASUS AT4NM10T-I server.

The physical setup in the demo sector is depicted in Fig. 4. The APs are deployed more or less uniformly covering the sector. They are cabled to the switches which are connected to the central server. These cables are also used to power the APs via PoE (Power over Ethernet) technology.

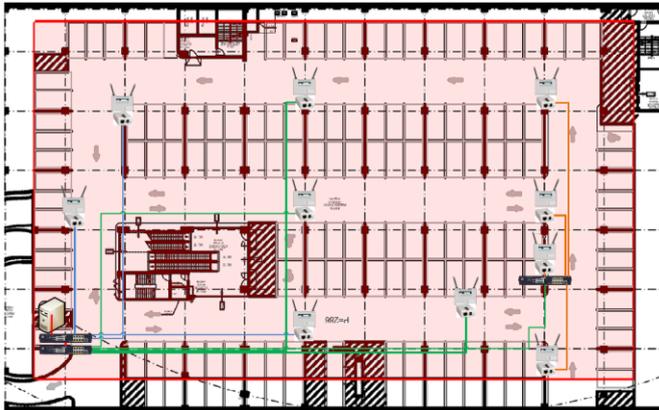


Figure 4. Physical setup of our prototype system

C. Positioning Methods

As we mentioned above, our iParking system is prepared to investigate different localization approaches. For estimating the exact position fingerprint based methods and triangulation techniques can be used. For a less precise positioning and assessing only in which road segment the vehicle is using sensor gates can be an alternative approach.

So far, we have implemented a fingerprint based method. In this case, first we build the fingerprint database of the given area by measuring and collecting RSS data of all the APs in predefined points of the area. We set these points as the junctions of a grid with 4m grid distance. Then, the visiting device to be located continuously measures any perceived signal from the APs and sends these measurements to the server. The server calculates the position estimation based on the stored fingerprint information running a positioning algorithm, which is the KNN algorithm in our case, and sends back the result to the visiting device.

We modified the original KNN algorithm and extended it with weighted average calculation, memory and road fitting methods. The position is calculated as the weighted average of the two nearest RSS neighbor coordinates and the previous returned position, shown in the following equation:

$$(x_b, y_t)' = w_1(x_{KNN1}, y_{KNN1}) + w_2(x_{t-1}, y_{t-1}) + w_3(x_{KNN2}, y_{KNN2}),$$

where w_n is the applied weight ($w_1 > w_2 > w_3$). The calculated $(x_b, y_t)'$ is used to find the closest reference point in the fingerprint database if road fitting is switched on. The proposed position calculation method smooths the effect of sudden RSS variations due to false measurements and keeps the estimated vehicle position on the route.

D. Navigation

The navigation software is running on the driver's mobile device presenting the map of the visited parking garage. Entering the garage the driver on a touch screen expresses his/her preferences to find an appropriate free parking lot. Based on that the iParking system selects a lot and sends its coordinates to the driver's mobile device. The navigation software computes a shortest path to the selected lot, and based on the continuously received position estimation updates navigates the driver. Fig. 5 shows a screenshot of the navigation interface implemented on Android platform.

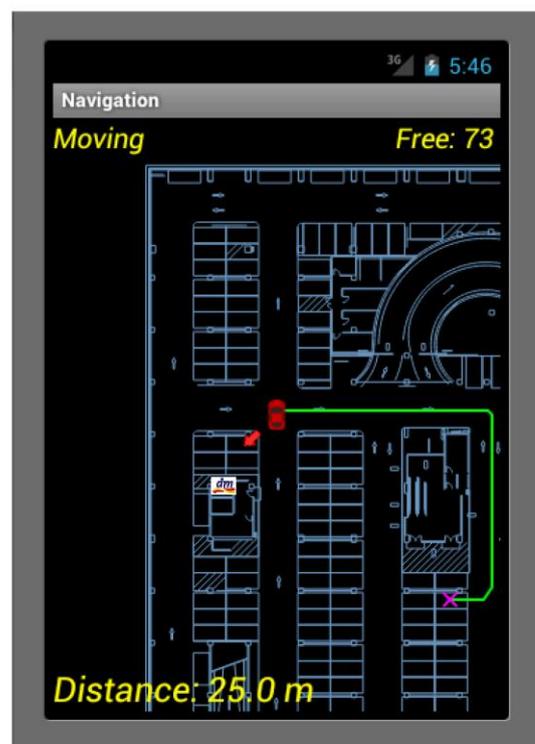


Figure 5. Screenshot of the navigation interface

V. PRELIMINARY EVALUATION

The minimum required accuracy of a parking assistant system depends on the dimensions and the floor plan of the parking garage, the allowed driving speed, and some other factors. In the iParking demonstration sector, the parallel routes are 10 meters far from one another, the floor plan is fairly simplistic, and the allowed driving speed is 30km/h resulting in 2–3 meters required accuracy for smooth navigation according to our experiments. We could achieve 5–7 meters average accuracy with the implemented fingerprint based positioning method so far, which makes the navigation challenging.

The accuracy can be improved if adequate fingerprint database is selected as the reference. We have analyzed a simple fingerprint algorithm that selects the reference database according to the entrance point of the user. In case of users coming from inside the shopping mall and looking for their car, a pedestrian database is selected for the KNN algorithm, while users entering from outside the building through the garage entrance will require the usage of the in-vehicle database. We have analyzed the performance of the adaptive fingerprint database selection and compared the positioning accuracy using the different databases in the different scenarios. The measurements were performed on an assigned 200m long track in the parking garage. From entering the garage until reaching the end of the track, about 30–40 position estimations were logged on the central server. The average of the estimated position accuracy is presented in Table I.

TABLE I. AVERAGE POSITIONING ACCURACY FOR DIFFERENT TYPE OF USERS AND FINGERPRINT DATABASES

	Pedestrian DB		In-vehicle DB	
	Simple	Road fit	Simple	Road fit
Pedestrian	2.61m	1.76m	8.29m	8.02m
Vehicle	11.31m	11.22m	4.50m	4.21m

According to the obtained results, significant improvement can be achieved if the reference database is selected based on the user features. Moreover, switching on the road fitting function in the positioning application the average error distance can be decreased further.

We investigated also the effect of the parking lot occupation level on the positioning accuracy. We experienced 4–6 meters as the mean error when the parking garage was almost empty. On the other hand, the mean error increased up to 8–10 meters when the occupation level of the parking lots was above 75%. The reference fingerprint database was recorded in the empty garage. These results point out that the parking vehicles influence substantially the signal propagation properties, as we expected. Thus, using several fingerprint databases and select the appropriate one based on the actual situation can help here, too.

At the moment, we are working on improving the performance of the positioning part by extending the basic algorithm with memory, route fitting techniques and other heuristics, and by implementing and investigating other localization approaches, such as sensor gates.

VI. SUMMARY

In this paper, we introduced and described our intelligent indoor parking assistant system called iParking. Our system, using a Wi-Fi based background infrastructure, tracks the

position of the vehicle entering the parking garage and navigates the driver via his/her smartphone to an appropriate free parking lot. Currently, we have been implementing a prototype of our iParking system in a parking garage of a shopping center and working on improving the positioning accuracy.

As future work, we plan to investigate further the effect of using several specific fingerprint databases combined with advanced database selection algorithms. Moreover, we plan to introduce other location based services on top of the basic positioning and navigation system, such as personal navigation, shop advertisements, virtual tours, etc.

ACKNOWLEDGMENTS

The publication was supported by the TÁMOP-4.2.2.C-11/1/KONV-2012-0001 project. The project has been supported by the European Union, co-financed by the European Social Fund. Károly Farkas has been partially supported by the János Bolyai Research Scholarship of the Hungarian Academy of Sciences.

REFERENCES

- [1] H. Liu, H. Darabi, P. Banerjee, and J. Liu, "Survey of Wireless Indoor Positioning Techniques and Systems," *IEEE Transactions on Systems, Man, and Cybernetics, Part C: Applications and Review*, vol. 37, no. 6, pp. 1067–1080, Nov. 2007.
- [2] P. Bahl and V. N. Padmanabhan, "RADAR: An in-building RF based user location and tracking system," in *Proceedings of the 19th IEEE International Conference on Computer Communications (INFOCOM 2000)*, vol. 2, Tel Aviv, Israel, March 2000, pp. 775–784.
- [3] P. Bahl and V. N. Padmanabhan, "Enhancements to the RADAR user location and tracking system," Microsoft Corp., Tech. Rep. MSR–TR–2000-12, Feb. 2000.
- [4] M. Youssef, A. Agrawala, and A. Udaya Shankar, "WLAN Location Determination via Clustering and Probability Distributions," in *Proceedings of the First IEEE International Conference on Pervasive Computing and Communications (PerCom 2003)*, Dallas-Fort Worth, TX, USA, March 2003, pp. 143–150.
- [5] M. Youssef and A. K. Agrawala, "Handling samples correlation in the Horus system," in *Proceedings of the 23rd IEEE International Conference on Computer Communications (INFOCOM 2004)*, vol. 2, Hong Kong, China, March 2004, pp. 1023–1031.
- [6] P. Castro, P. Chiu, T. Kremenek, and R. R. Muntz, "A probabilistic room location service for wireless networked environments," in *Proceedings of 3rd International Conference on Ubiquitous Computing (UbiComp '01)*, Atlanta, USA, Sept. 2001, pp. 18–34.
- [7] M. Ladd, K. E. Bekris, G. Marceau, A. Rudys, L. E. Kavradi, and D. S. Wallach, "Using wireless Ethernet for localization," in *Proceedings of IEEE/RJS International Conference on Intelligent Robots and Systems*, vol. 1, Lausanne, Switzerland, Sept. 2002, pp. 402–408.
- [8] Haeberlen, E. Flannery, A. M. Ladd, A. Rudys, D. S. Wallach, and L. E. Kavradi, "Practical robust localization over large-scale 802.11 wireless networks," in *Proceedings of the 10th ACM International Conference on Mobile Computing and Networking (MobiCom '04)*, vol. 1, Philadelphia, USA, Sep. 26–Oct. 1 2004, pp. 70–84.
- [9] Ekahau Inc., "Ekahau Positioning Engine 2.0." www.ekahau.com.